



Installation dimensions

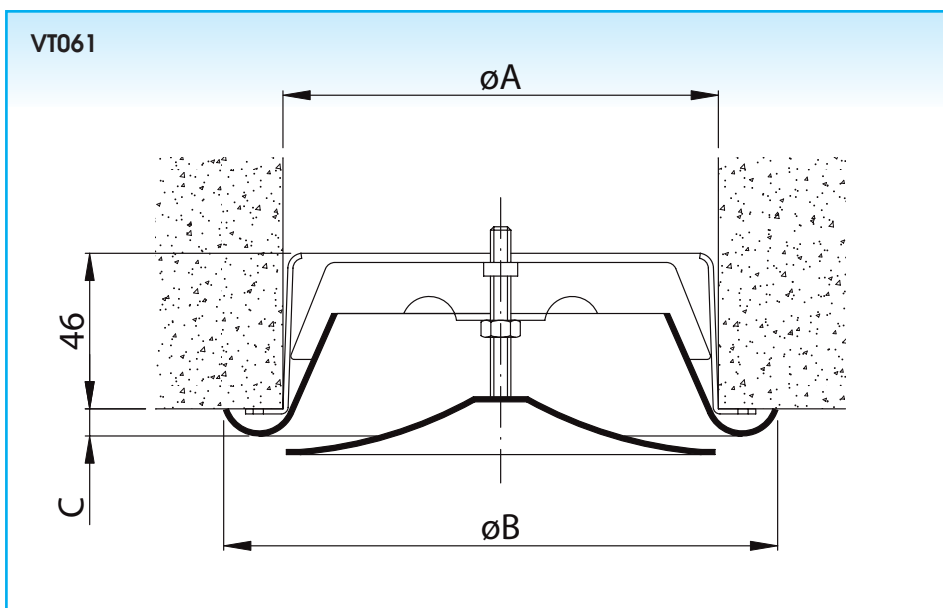

Size	100	125	160	200
ø A	100	125	160	200
ø B	137	164	212	248
C	10	10	10	12

All dimensions in mm

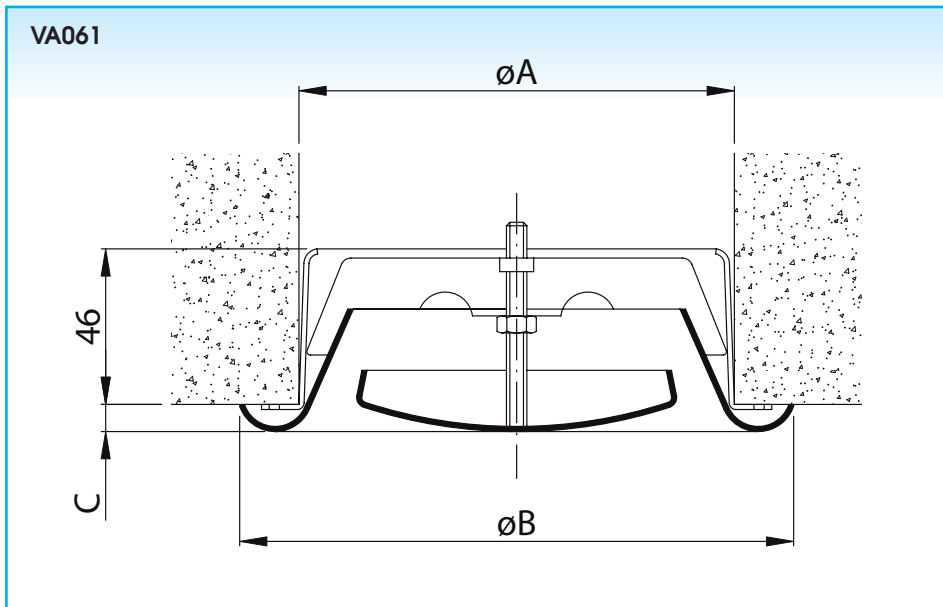

Application

The V-060 valves are used for air exhaust and/or supply in ventilation-systems. They can be mounted in a wall, a ceiling or beneath exposed air ducts. Their principal field of application are offices, hospitals, nursing-homes and hotels. The removable interior and the smooth surface make the valve easy to clean.

Technical information

Characteristics

- **VT:** central disc attached to a threaded rod
- **VA:** the disc is placed in a conical ring and attached to a threaded rod
- easy air flow adjustment by continuous regulation
- easy to clean

Construction

VA/VT: steel sheet, painted white (RAL 9010), mounting ring in galvanised steel sheet

Specifications description

Example:

Circular steel valve for air exhaust made out of white polypropylene with adjustable interior for the regulation of the air flow.

The desired position can be locked by means of a counter nut. Interior is removable from mounting ring.

Type: VA061

Size ... mm

Fixing

- **VA/VT:** direct fixing into the duct by means of friction springs or with the mounting ring. First the mounting ring has to be fixed into the duct outlet before the valve is pushed into the ring.
- Airflow adjustment by turning the central disc. Once the adjustment is made, lock the disc by means of the counter nut at the back.

Delivery possibilities

- **VA061:** steel exhaust valve with mounting ring
- **VT061:** steel supply and exhaust valve with mounting ring

How to order

VA061 with mounting ring, size 200 mm

V	A	0	6	1	-	-	0	2	0	0	-	-	-	-
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

size

-: white (RAL 9010)
F: other RAL-colors

1: with mounting ring

A: exhaust: steel
T: exhaust and supply: steel